

## SiC Diode Power Module




$V_{DC}$	1200V
$I_F$	2×60A
$T_{J,max}$	175°C

### Applications

- Welding equipment
- Uninterruptible power supply (UPS)
- High frequency power supply
- Induction heating
- High speed rectifiers

### Features

- SiC Schottky Diode
    - Zero reverse recovery
    - Zero forward recovery
    - Temperature independent switching behavior
    - Positive temperature coefficient on  $V_F$
  - Very low stray inductance
  - Low forward voltage
  - Isolated package (SOT-227)
  - Low noise switching
- RoHS compliant

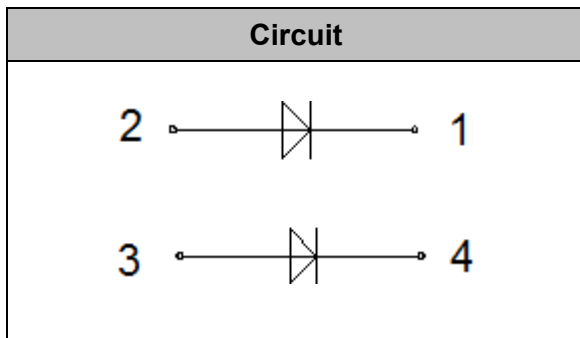

### ■ Absolute Maximum Ratings ( $T_J=25^\circ\text{C}$ unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	VALUE	UNIT
Peak Repetitive Reverse Voltage	$V_{RRM}$	$T_J=25^\circ\text{C}$	1200	V
DC Blocking Voltage	$V_{DC}$	$T_J=25^\circ\text{C}$	1200	V
Continuous Forward Current	$I_F$	$T_C=25^\circ\text{C}, T_J=175^\circ\text{C}$	117*	A
		$T_C=125^\circ\text{C}, T_J=175^\circ\text{C}$	60*	
		$T_C=135^\circ\text{C}, T_J=175^\circ\text{C}$	51*	
Non-Repetitive Peak Forward Surge Current	$I_{FSM}$	$T_C=25^\circ\text{C}, T_P=10\text{ms}, \text{Half Sine Wave}$	430*	A
$I^2t$ Value	$\int I^2 dt$	$T_C=25^\circ\text{C}, T_P=10\text{ms}$	920*	$\text{A}^2\text{s}$
Power Dissipation	$P_{Tot}$	$T_C=25^\circ\text{C}$	325*	W
Operating Junction Temperature	$T_{J,op}$		-40...175	$^\circ\text{C}$
Storage Temperature	$T_{STG}$		-40...125	$^\circ\text{C}$



# MB120DU12FJ

## ■ Electrical Characteristics ( $T_J=25^{\circ}\text{C}$ unless otherwise specified)

PARAMETER	Symbol	TEST CONDITIONS	VALUE			UNIT
			Min.	Typ.	Max.	
Reverse Current	$I_R$	$V_R=1200\text{V}, T_J=25^{\circ}\text{C}$	--	3.6	100	$\mu\text{A}$
		$V_R=1200\text{V}, T_J=175^{\circ}\text{C}$	--	13.4	--	
Forward Voltage	$V_F$	$I_F=60\text{A}, T_J=25^{\circ}\text{C}$	--	1.39	1.7	V
		$I_F=60\text{A}, T_J=175^{\circ}\text{C}$	--	1.86	--	
Total Capacitance	C	$V_R=1\text{V}, f=1\text{MHz}$	--	3650	--	$\text{pF}$
		$V_R=400\text{V}, f=1\text{MHz}$	--	321	--	
		$V_R=800\text{V}, f=1\text{MHz}$	--	240	--	
Total Capacitive Charge	$Q_C$	$V_R=800\text{V}$	--	340	--	nC
Capacitance Stored Energy	$E_C$	$V_R=800\text{V}$	--	88	--	$\mu\text{J}$

## ■ Thermal and Package Characteristics ( $T_J=25^{\circ}\text{C}$ unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	VALUE			UNIT
			Min.	Typ.	Max.	
Thermal Resistance, Junction to Case	$R_{thJC}$	Per leg		0.46*		$^{\circ}\text{C}/\text{W}$
Isolation Breakdown Voltage	$V_{isol}$	AC, 50Hz (R.M.S), $t=1\text{min}$	3000			V
Mounting Torque	M	Recommended (M4 screw)	0.6		1.2	Nm
Terminal Connection Torque		Recommended (M4 screw)	0.6		1	
Weight	W			27		g

\*Based on the results of simulation or calculation



# MB120DU12FJ

## Typical Performance Per Leg

Fig1. Forward Characteristics

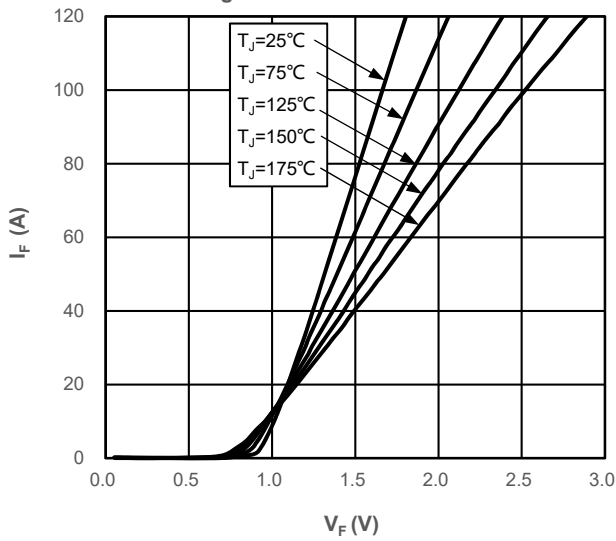


Fig2. Reverse Characteristics

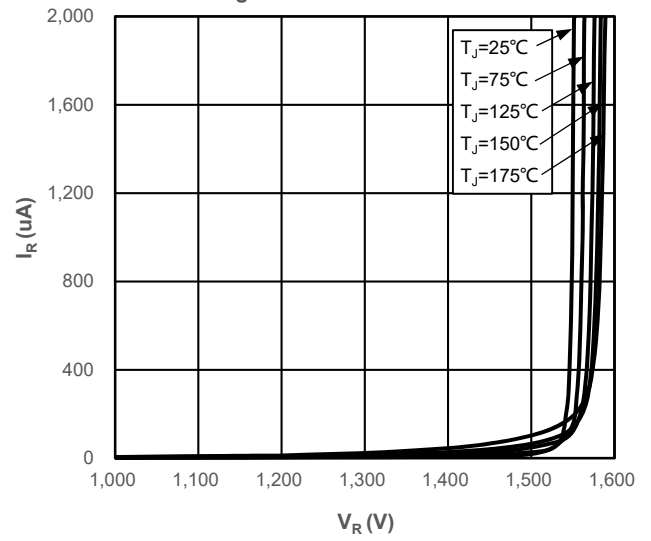


Fig3. Current Derating

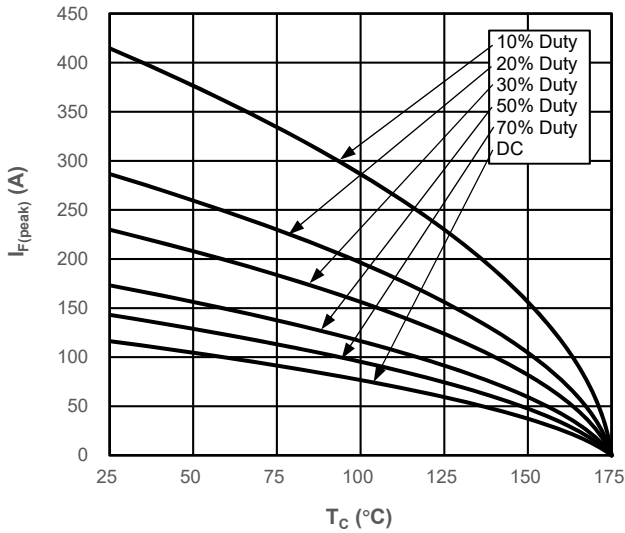


Fig4. Power Derating

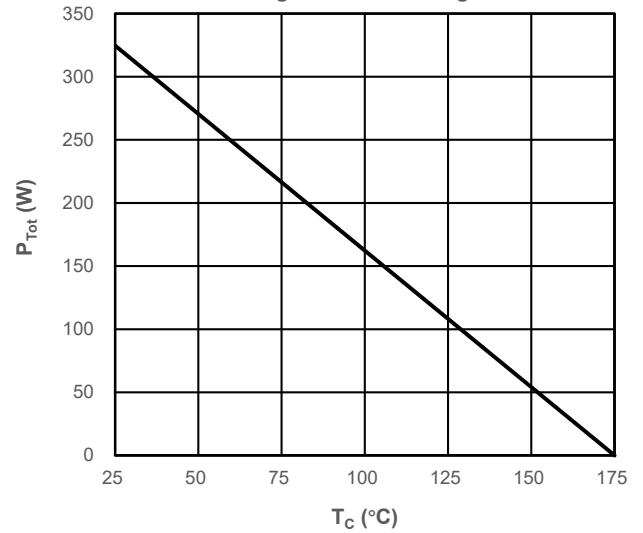


Fig5. Recovery Charge vs. Reverse Voltage




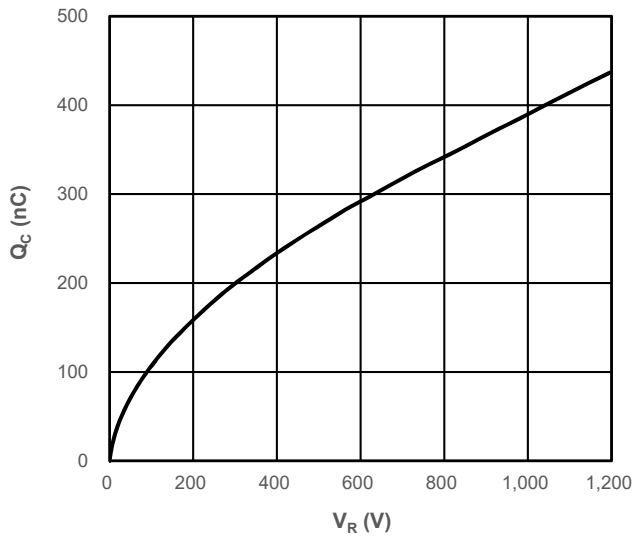


Fig6. Capacitance vs. Reverse Voltage

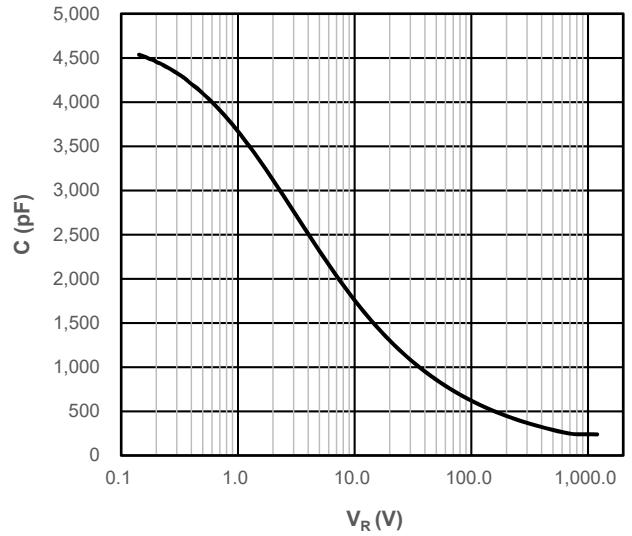

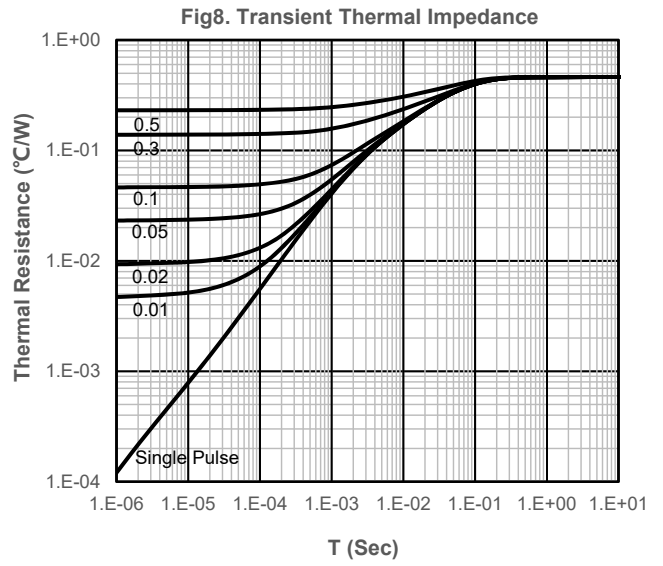

# MB120DU12FJ

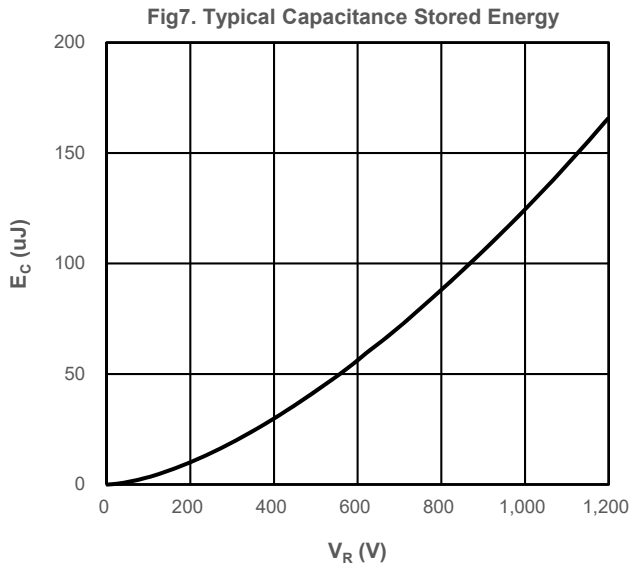





## MB120DU12FJ

---

### Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.